


HydraX™ Cat. 5e Modular Jack

90° 110 IDC Punch Down Type Unshielded Modular Jack

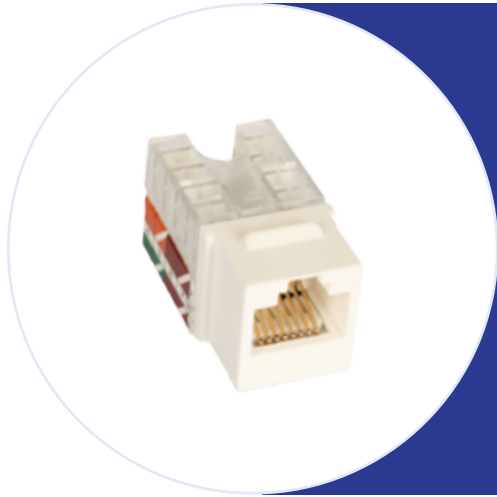

HydraX™ Cat. 5e 110 IDC punch down modular jacks are RJ45 8P 8C 50µm jacks suitable for 22-26AWG stranded and solid wire, compatible with 110 IDC punch down tools.

They are available in universal labels colour coded for T568A and T568B wiring schemes.

Features and Benefits

Compatible with all HydraX™ modular copper data patch panels and full range of faceplate.

Complies and exceeds international standards of ANSI/TIA-568-C.2.

Universal termination applicable for T568A and T568B wiring schemes.

Standards

ANSI/TIA-568.C

ISO/IEC 111801

RoHS compliance




CHARACTERISTICS & PROPERTIES

Temperature range	Operation	-10°C ~ + 60°C
Insertion Force (max)	Unshielded	Max. 20N
Retention Strength	Between Jack and Plug	7.7kgs
Durability		750 cycles
Conductor compatibility		AWG 22 ~ 26
Jack Housing		ABS+PC
IDC Housing		PC
Jack Contact		Phosphor bronze, nickel plated 50µ gold plated
IDC		Phosphor bronze, tin plated
IDC Cap		PC

HydraX™ Cat. 5e Modular Jack

90° 110 IDC Punch Down Type Unshielded Modular Jack

TECHNICAL DATA



PRODUCT CODE

KJ-5e000-WHS

DESCRIPTION

Cat. 5e unshielded punch down type modular jack, white

TERMINATION

110 IDC