


LadonX™ Category 6A


F/FTP 23AWG LSOH Jacket Data Cable

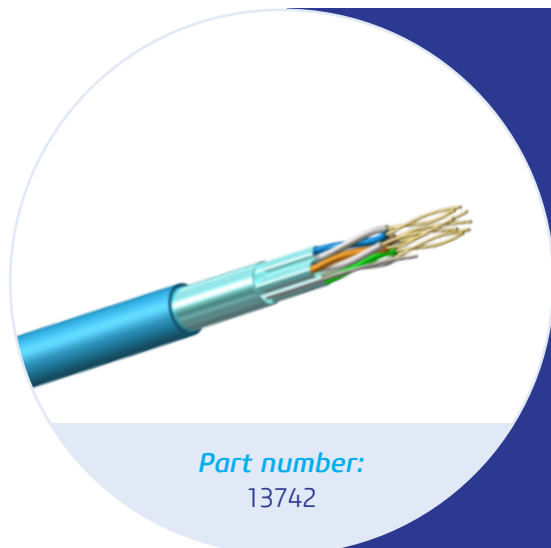

LadonX™ series Cat. 6A F/FTP LSOH data cable is well suited for 10 Gigabit Ethernet Cabling System and installation in fire safety environments. Bandwidth frequency up to 500Mhz.

Superior design of overall and individual pair shielding provide excellent electromagnetic/radio frequency interference (EMI/RFI) protection and alien crosstalk suppression.

The Hermesys shielded structured cabling system comprises of shielded modular connectors, patch panels, patch cords and cables. The system is ideal for deployment in all mission-critical network systems where EMI/RFI might be of a concern.

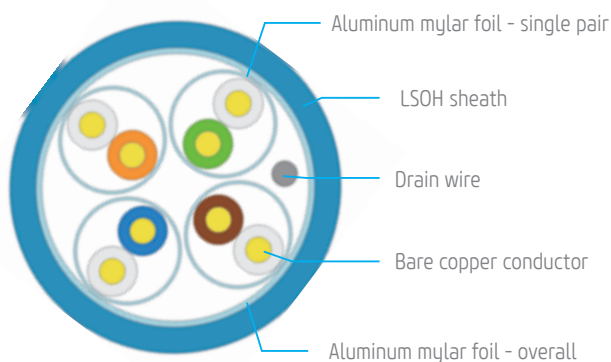

Cross section of part number:
< Not to scale >

Features and Applications

Each single pair and overall shielded with Aluminum foil. Constructed without cross filler which reduce the cable overall diameter and make cable much flexible for installation.

Available for Power Over Ethernet (POE), POE +

Data cable for structured premises cabling, digital/analogue voice, video and data signals.

RoHS Compliant

Standards

Comply

ANSI/TIA 568-C.2
ISO/IEC 11801

Flame Resistance

IEC 60332-1-2
IEC 60754-2
IEC 61034-1 & -2

LadonX™ Category 6A

F/FTP 23AWG LSOH Jacket Data Cable

Cable Description

CONDUCTOR & INSULATION

Conductor Material	Annealed Bare Copper
Conductor Size	23 AWG
Insulation Material	Foam PE
Cross Filler	N/A

PAIRS

Pair 1	Blue / White - Blue
Pair 2	Orange / White - Orange
Pair 3	Green / White - Green
Pair 4	Brown / White - Brown

SHIELDED & JACKET

Drain Wire	0.40mm Tinned Copper
Single Pair Shielding	Aluminum Foil
Overall Shielding 1	Aluminum Foil
Overall Shielding 2	N/A
Jacket Type	LSOH
Cable Overall Diameter	7.70 ± 0.4 mm

PHYSICAL TECHNICAL DATA

Cold Bend Test	-20 ± 2°C * 4hrs no. crack
Jacket Min Tension Strength (psi) Before Aging	
Jacket Min Elongation (%) Before Aging	
Jacket Min Tension Strength (psi) After aging	
Jacket Min Elongation (%) After Aging	
Min. Bending Radius (mm)	≥ 8 * cable diameter
Max Pulling Tension (N)	≤ 100N
Installation Temperature	0°C to +50°C
Operating Temperat	-20°C to +70°C

LadonX™ Category 6A

F/FTP 23AWG LSOH Jacket Data Cable

ELECTRICAL TECHNICAL DATA

Conductor Resistance (ohm/100m @ 20 c)

DC Resistance Unbalance (%)

Pair-to-ground Capacitance Unbalance (pF/Km)

Velocity of Propagation

Input Impedance (ohm)

75%

100 ± 15 Ω (1 to 100 MHz)

100 ± 22 Ω (101 to 250 MHz)

100 ± 25 Ω (251 to 500 MHz)

IEC 61156-5 ed 2.0 Category 6a Horizontal Cable Parameters

AT 20°C

Freq. (MHz)	Ins. Loss (dB/100m)	RL (dB) Min	NEXT (dB/100m)	PS-NEXT (dB/100m)	PS-ACRF (dB/100m) Min	Delay Skew	Po. Delay (ns/100) Min
1	3.2	20.0	74.3	72.3	64.8	45	570
4	5.7	23.0	65.3	63.3	52.8	45	552
10	8.9	25.0	59.3	57.3	44.8	45	545
16	11.3	25.0	56.2	54.2	40.7	45	543
20	12.6	25.0	54.8	52.8	38.8	45	542
31.25	15.8	23.3	51.9	49.9	34.9	45	540
62.5	22.5	20.7	47.4	45.4	28.9	45	539
100	28.7	19.0	44.3	42.3	24.8	45	538
200	41.4	16.4	39.8	37.8	18.8	45	537
250	46.7	25.6	38.3	36.3	16.8	45	536
300	51.5	14.9	37.1	35.1	15.3	45	536
500	68.0	13.0	33.8	31.8	10.8	45	536

Ordering information

Part Number

13742

Sheath Marking

Hermesys LadonX Cat. 6A F/FTP LSOH Data Cable 13742 IEC 60332-1 ANSI/TIA 568-C.2 ISO/IEC 11801 xxxxM MMY

Shipping information

13742-500D

500m/wooden drum