

## LadonX™ ADSS Aerial Cable


24/48 Core Loose Tube, Double Jacket Non Metallic Cables



Hermesys LadonX™ All-Dielectric Self-Supporting cables are designed for easy and fast single pass installation. The super long span length design can achieve 400m.

The light weight construction is ideal for using along utility poles for cable television, telecom or other outside plant campus backbone applications without the need for cable lashing or grounding or where metallic cable can not be used. The cable is suitable for power lines under 110kV.

Round cable design minimized wind and ice loading for reducing cable sag and tensile forces on towers and support hardware.

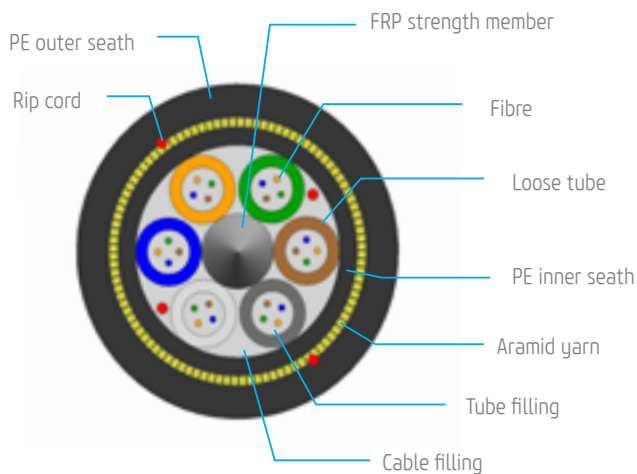

**Cross section of part number:**  
< Not to scale >

### Features and Benefits

Non metallic FRP central strength member is lighter and more flexible. No rust problem in the whole cable life.

PBTP loose tube filling with suitable water tightness compound to prevent the ingress of water.

Loose tubes S-Z stranded around the central strength member.

Aramid yarns strength elements for superior cable tensile strength and stability.

The Black PE jacket is suitable for outdoor use with high performance UV resistance.

### Standards

#### Reference

IEC 60794  
IEC 60793  
Telcordia GR-20-CORE

# LadonX™ ADSS Aerial Cable

24/48 Core Loose Tube, Double Jacket Non Metallic Cables

## Specifications

### GENERAL SPECIFICATIONS

Environment	Outdoor
Application	Self-support Aerial, River crossing
Cable Type	Multi loose tube
Product Type	Telecom outside plant
Flame Rating	N/A
Fibre Category	Full range of fibre
Span Length	400m
Drum Length	4000m

### TEMPERATURE RANGE

Storage	-40°C to 70°C
Operation	-40°C to 70°C
Installation	-10°C to 60°C

### CABLE DESIGN

Fibre Count	24/48/96/144
Fibre Color	EIA/TIA 598 standard
Tensile Strength Elements	FRP non metallic strength member
Strength Member	Aramid Yarn
Number of Loose Tube	1-6 (max 12 Fibre per tube)
Inner Jacket Material & Colour	High density polyethylene, Black
Outer Jacket Material & Colour	High density polyethylene, Black

### MECHANICAL CHARACTERISTICS CABLE

Max. Tensile Strength, Short-term (N)	12000N (24f, 48f), 13500N (96f), 15000N (144f)
Crush Resistance, Short-term (N)	2200N
Max. Breaking Load	20000N (24f, 48f), 22500N (96f), 25000 (144f)
Nominal Outer Diameter (mm)	12.6 (24f, 48f), 15.0 (96f), 18.2 (144f)
Nominal Weight (kg/km)	120 (24f, 48f), 174 (96f), 272 (144f)
Min. Bend Radius Installation	20 * diameter
Min. Bend Radius Operation	10 * diameter

# LadonX™ ADSS Aerial Cable

24/48 Core Loose Tube, Double Jacket Non Metallic Cables

## CHEMICAL CHARACTERISTICS

ROHS

Free of hazardous substances according to RoHS  
2002/95/EG

## Fibre Specifications

Refer the Hermesys fibre specification as per order

## Ordering information

Part Number

20XYY0(0)0414-400

Sheath Marking

Hermesys LadonX ADSS Double Jacket Non Metallic  
Cable 20XYY0(0)0414-400<Fibre Type> <XXXcore>  
WWYYYY

### Notes:

1) X = type of Fibre (0/G652D, 1/OM1, 2/OM2, 3/OM3, 4/OM4, 5/G655, 6/G657A1, 7/G657A2, 8/G657B1, 9/G657B2)

2) YY = Number of Core (2D/24 cores, 4H/48 cores)

## Shipping information

Packaging Method

Wooden drums with protection

Delivery Lengths

Standard delivery length is 4km with a tolerance of  $\pm 5\%$