

## LadonX™ FTTH Drop Cable

1/2/4 Core Self-Supporting Flat Fibre Optic Drop Cables




Part number:  
20XYY25044

Hermesys LadonX™ FTTH flat drop cable is well suited for usage in high speed broadband telecommunication applications.

Suitable for both indoor and outdoor installation.

Two parallel steel strength members offer superior crush resistance and protection to the fibre cores.

Light weight, compact design and excellent low bending attenuation make it especially suitable for complicated wiring within indoor environment.

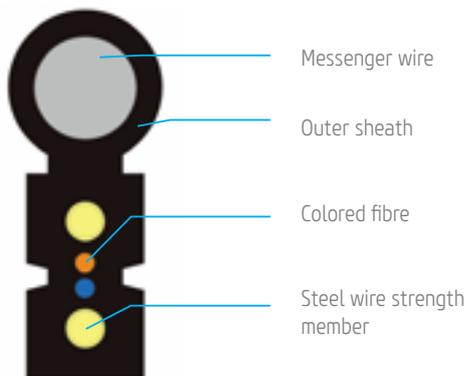

Cross section of part number:  
< Not to scale >

### Features and Benefits

Available in G652D and G657A1/A2/B1/B2/B3.

The 2 parallel steel strength members ensure reliable crush resistance for fibre protection.

Steel messenger wire for self-supporting and easy installation.

The black LSOH material ensure that the cable can meet the indoor and outdoor application.

Compact and light weight, low purchasing and construction cost.

### Standards

#### Comply

IEC 60794-1-2-E1, IEC 60794-1-2-E3  
IEC 60794-1-2-E4, IEC 60794-1-2-E6  
IEC 60794-1-2-E11, IEC 60794-1-2-F1

#### Flame Resistance

IEC 60332-1  
IEC 61034  
IEC 60754-1 & 2

# LadonX™ FTTH Drop Cable

*1/2/4 Core Self-Supporting Flat Fibre Optic Drop Cables*

## Specifications

### GENERAL SPECIFICATIONS

Environment	Indoor/Outdoor
Application	FTTH, interconnecting buildings
Cable Type	FTTX drop cable with UV resistant
Product Type	Telecom inside plant
Flame Rating	IEC 60332-1
Fibre Category	Full range of fibre
Drum Length	2000m

### TEMPERATURE RANGE

Storage	-40°C to 70°C
Operation	-40°C to 70°C
Installation	-10°C to 60°C

### CABLE DESIGN

Fibre Count	1/2/4
Fibre Color	EIA/TIA 598 standard
Tensile Strength Elements	Steel wire strength member * 2
Messenger Wire	1.2mm steel wire
Outer Jacket Material	LSOH
Outer Jacket Color	Black

### MECHANICAL CHARACTERISTICS CABLE

Max. Tensile Strength, Short-Term	600N
Max. Tensile Strength, Long-Term	300N
Crush Resistance, Short-Term	1000N/100mm
Crush Resistance, Long-Term	500N/100mm
Nominal Outer Diameter (mm)	2.0 * 5.2 mm
Nominal Weight (kg/km)	15.5 (1f), 16.0 (2f), 19.0 (4f)
Min. Bend Radius Installation	20 * diameter
Min. Bend Radius Operation	10 * diameter

# LadonX™ FTTH Drop Cable

1/2/4 Core Self-Supporting Flat Fibre Optic Drop Cables

## CHEMICAL CHARACTERISTICS

ROHS

Free of hazardous substances according to RoHS  
2002/95/EG

## Fibre Specifications

Refer the Hermesys fibre specification as per order

## Ordering information

Part Number

20XYY25044

Sheath Marking

Hermesys LadonX Self-Support Drop Cable LSOH Jacket  
20XYY25044 <Fibre Type> <XXXcore> WWYYYY XXXXM

Notes:

- 1) X = type of fibre (0/G652D, 1/OM1, 2/OM2, 3/OM3, 4/OM4, 5/G655, 6/G657A1, 7/G657A2, 8/G657B1, 9/G657B2)
- 2) YY = Number of Core (2/2cores, 4/4 cores)

## Shipping information

Packaging Method

Wooden drums with protection

Delivery Lengths

Standard delivery length is 2km with a tolerance of  $\pm 5\%$